



PV-112TRREL w/o hose assembly, SST - Fire hydrant cabinet

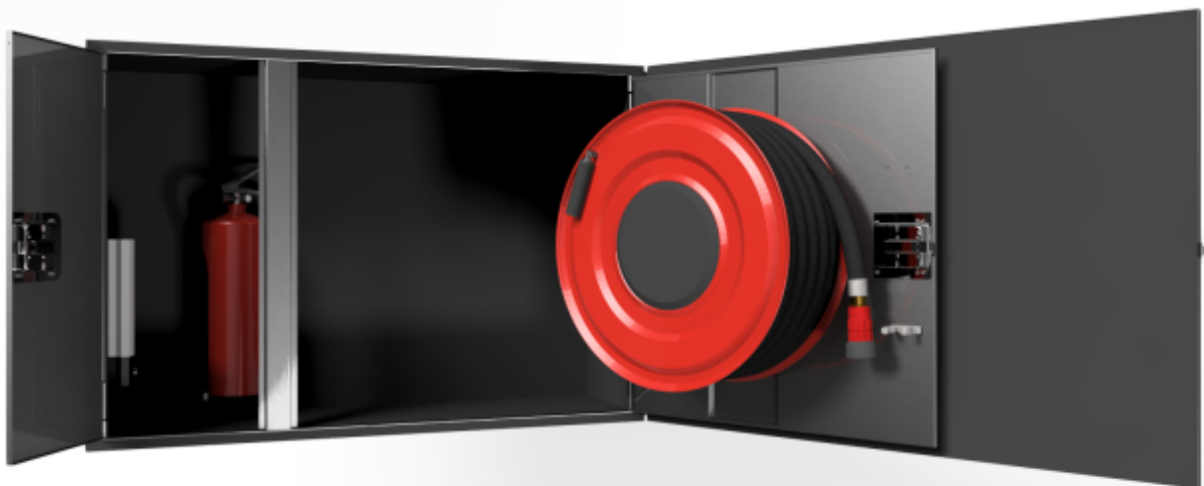

PV-112TRREL w/o hose assembly, SST - Fire hydrant cabinet



Insulated industrial-grade fire hydrant cabinet with heater, cabinet and reel made of stainless steel. IP-31. Double insulated door, 19mm cellular rubber heat insulation. Thermostat-controlled electric resistor 200W (230V). Price excludes hose and spray nozzle. Choose hose combination here. Maximum hose sizes 19 mm / 40 m or 25 mm / 30 m, lightweight hose 19 mm / 45 m or 25 mm / 30 m. NOTE! CE-marked EN-671 approved rapid fire hydrant maximum hose length is 30m.

Features

Finnish "lvi-number"	2955153
EN 671-1 / 2012 approved	YES
Height (mm)	790
Width (mm)	1150
Depth (mm)	365
Heat insulated	YES